



General Product Catalogue



A large industrial machine for producing plastic pipes, featuring multiple extruders with hoppers, rollers, and a control panel. The machine is white and grey, with various pipes and hoses connected. A person's hand is visible on the right, operating a control panel.

AKANSU GROUP founded in 1915 and operates in three different sectors.

AKANSU GROUP started its business life in 1915 with the sale of glass under the brand name of AKANSU GLASS brand.

AKANSU GLASS, the leading company in its sector, has a wide range of products to meet the demands of the market.

In 1996, it started to produce plastic window and door profile systems under the brand of AKANSU PROFILE. It has successfully completed many prestigious housing projects with its dealer networks in Turkey and abroad.

In 2006, it started the production of infrastructure plastic pipes with the AKANSU PIPE brand. AKANSU PIPE, which continues its investments rapidly, completed the investment of a equipped with the latest technology new production facility with an area of 100,000 m² in 2017. With the investment it has put into operation, it has become one of the factories with the highest production capacity in Turkey and Europe. In 2018, it started the production of superstructure plastic pipes and fittings.

AKANSU PIPE manufactures infrastructure and superstructure plastic product groups with the latest technology and full automation production techniques. AKANSU PIPE, which has an accredited and independent testing laboratory within its structure, is also a brand that has international quality certificates and is approved by institutions of many countries.

AKANSU PIPE has successfully completed the production and sale of many prestigious infrastructure and superstructure projects at home and abroad.

Its purpose is to put on the market products that provide quality and customer satisfaction by following new technologies in developing and changing world.

Polyethylene Perforated Pipes

Perforated drainage pipes are utilized for the effective evacuation of excess subsurface water accumulated in soil and under-ground layers.

Akansu Boru manufactures perforated drainage pipes with customized circular perforations or slotted configurations, precisely engineered to meet specific customer requirements and project dimensions.

Following the perforation processes, a geotextile filter coating can be applied upon request to enhance filtration and prevent soil ingress.


Strict adherence to installation guidelines is paramount during the laying of perforated drainage pipes. To eliminate the risk of clogging and guarantee long-term operational efficiency, precise installation methods must be followed. Proper execution ensures trouble-free pipeline integrity and delivers maximum hydraulic performance.

Usage Areas of Perforated Drainage Pipes

- Solid waste landfill storage facilities
- Agricultural land dewatering and drainage systems
- Reclamation and stabilization of muddy or loamy soils
- Mining sites and sub-surface drainage
- Subbase infrastructure for sports complexes and turf fields
- Foundation protection for buildings and civil engineering structures against groundwater
- Highway shoulder drainage systems

Advantages of Perforated Drainage Pipes

- **Easy Installation:** Lightweight structure ensures rapid and cost-effective onsite handling.
- **Superior Mechanical Strength:** Engineered from PE raw materials for high load-bearing capacity and ring stiffness.
- **Chemical Resistance:** Outstanding immunity to corrosive chemicals, acidic soils, and industrial effluents.

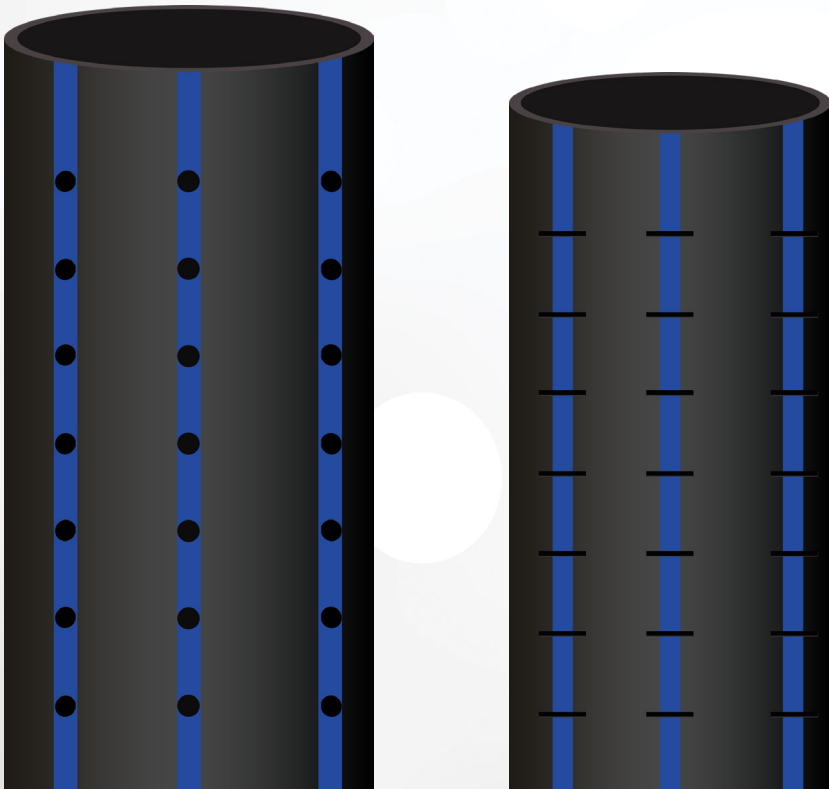

DIAMETER AND WALLTHICKNESS OF POLYETHYLENE PERFORATED PIPES

DN		Tolerances (+), *		Wall Thickness															
		A*	B*	O*	S	Smax	S	Smax	S	Smax	S	Smax	S	Smax	S	Smax	S	Smax	S
mm	mm				mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
20	0,3	0,3	0,3	1,2									2,0	2,3	2,7	3,0	3,4	3,3	3,7
25	0,3	0,3	0,3	1,2									2,0	2,3	2,7	3,0	3,5	4,2	4,6
32	0,3	0,3	0,3	1,3					2,0	2,3	2,4	2,8	3,0	3,4	3,6	4,1	4,4	5,3	5,9
40	0,4	0,4	0,4	1,4					2,0	2,4	2,8	3,0	3,5	3,7	4,2	4,5	5,5	6,7	7,3
50	0,5	0,4	1,4						2,0	2,4	2,8	3,0	3,4	3,7	4,2	5,6	6,3	8,3	9,2
63	0,6	0,4	1,5						1,9	2,1	2,5	2,9	3,0	3,4	3,8	4,3	5,3	10,5	11,6
75	0,7	0,5	1,6						2,3	2,5	2,9	3,3	3,6	4,1	4,5	5,1	6,3	12,5	13,8
90	0,9	0,6	1,8						2,7	3,0	3,5	4,0	4,3	4,9	5,4	6,1	7,5	15,0	16,5
110	1,0	0,6	2,2						3,3	3,7	4,2	4,8	5,3	6,0	6,6	7,4	8,1	18,3	20,2
125	1,2	0,6	2,5						3,4	3,8	4,2	4,8	5,4	6,0	6,7	7,4	8,3	20,8	22,9
140	1,3	0,9	2,8						3,8	4,2	4,7	5,4	6,1	6,7	7,5	8,3	9,3	23,3	25,7
160	1,5	1,0	3,2						4,3	4,8	5,3	6,2	7,0	7,7	8,6	9,5	10,6	26,7	29,3
180	1,7	1,1	3,6						4,4	4,8	5,5	6,0	6,9	7,7	8,6	9,6	10,7	30,0	33,0
200	1,8	1,2	4,0						4,9	5,4	6,1	6,7	7,7	8,6	9,6	10,7	11,9	33,3	36,7
225	2,1	1,4	4,5						5,5	6,0	6,8	7,5	8,6	9,6	10,8	12,0	13,4	37,5	41,3
250	2,3	1,5	5,0						6,1	6,7	7,6	8,3	9,6	10,7	11,9	13,2	14,8	41,7	45,8
280	2,6	1,7	9,8						6,8	7,5	8,5	9,3	10,7	11,9	13,4	14,9	16,6	46,7	51,3
315	2,9	1,9	11,1						7,7	8,6	9,7	10,8	12,1	13,5	15,0	16,6	18,7	52,5	57,8
355	3,2	2,2	12,5						8,7	9,7	10,9	12,1	13,6	15,1	16,9	18,7	21,1	59,2	65,1
400	3,6	2,4	14,0						10,9	12,3	13,7	15,3	17,0	19,1	21,5	23,8	26,2	66,7	73,3
450	4,1	2,7	15,6						11,0	12,2	13,8	15,3	17,2	19,1	21,5	23,8	26,7	75,0	82,5
500	4,5	3,0	17,5						12,3	13,7	15,3	17,0	19,1	21,2	23,9	26,4	29,7	83,3	91,7
560	5,0	3,4	19,6						13,7	15,2	17,2	19,1	21,4	23,7	26,7	29,5	33,2	93,3	102,7
630	5,7	3,8	22,1						15,4	17,1	19,3	21,4	24,1	26,7	30,0	33,1	37,4	105,0	115,5
710	6,4	4,0	24,9						17,4	19,3	21,8	24,1	27,2	30,1	33,9	37,4	42,1	118,3	130,2
800	7,2	4,0	28,0						19,6	21,7	24,5	27,1	30,6	33,8	38,1	42,1	47,4	133,3	146,7

A* : Normal tolerance pipe outer diameter tolerance, mm. (as +)

B* : Precision tube outer diameter tolerance, mm. (as +)

O* : Tube ovality tolerance, mm. (as +)

Smax : Max Wall thickness, mm. (as +)

DN : Outer diameter

S : Wall thickness

FACTORY

address Organize Sanayi Bölgesi 17. Cad. No:2/2 Melikgazi / Kayseri
phone +90 352 321 36 77 - **fax** +90 352 321 28 87 - **email** info@akansu.com

ISTANBUL OFFICE

address Altunizade Mah. Kısıklı Cad. No: 3 Daire: 8 Üsküdar / İstanbul
phone +90 216 688 10 20 - **fax** +90 216 688 10 20 - **email** export@akansu.com